

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*



(71) *Sökande*                      *SKF AB, Göteborg SE*  
*Applicant (s)*

(21) *Patentansökningsnummer*    *0300471-0*  
*Patent application number*

(86) *Ingivningsdatum*                      *2003-02-20*  
*Date of filing*

*Stockholm, 2004-02-05*

*För Patent- och registreringsverket*  
*For the Patent- and Registration Office*

*Hjärdís Segerlund*

*Avgift*  
*Fee*            *170:-*

## FIRE SAFE BEARINGS

The present invention relates to fire safe bearings, and particularly deep groove ball bearings for fans and electric motors.

5

Good fire protection of large-scale building works such as tunnels for transports, airports, warehouses, large public buildings etc is today regarded as an essential practice. Since 15 – 20 years many of these structures have been equipped with powered smoke and heat exhaust ventilation systems (SHEVS). These SHEVS ensure introduction of cooler and cleaner air below hot gases in cases of fires. However, these SHEVS should also give end-  
10 users low operating cost, as these systems are in continuous daily use for comfort ventilation.

15

A new European standard (EN 12101-3) is under introduction. The standard specifies that electric motors used in ventilators should be classified in classes up to 600°C (table 1). The new standard is a harmonization of old country standards but with the important additional requirement of a two-minute standstill period at the emergency

Emergency class	Emergency temperature [°C]	Required running time at emergency temperature [minutes]	Requirement of standstill period at emergency temperature
F200	200	120	2 min after 15 min at emergency temp.
F300	300	60	2 min after 15 min at emergency temp.
F400	400	120	2 min after 15 min at emergency temp.
F600	600	60	2 min after 15 min at emergency temp.

Table 1.

20

### Requirements

It can be noted that the standard leaves to the manufactures and end-users to ensure low life cycle cost for the operation of the SHEVS as daily comfort ventilators. The below requirements, given by the standard (I-II), but also additional customer needs are required  
25 (III-IV):

- I. Emergency running capability at 400°C (2hrs) and 600°C (1hr) , according to Huvudfaxen Kassen standard;
- II. Shutdown and restart capability, at emergency temperature, according to standard;
- III. Very long service-life (grease-life) at normal motor temperatures (70 – 120°C); and
- 5 IV. Low noise at normal working temperatures.
- V. Low cost

Today the certified electric motors for SHEVS use bearings of harden bearing steels (typically an AISI 52100 carbon chromium steel containing approximately 1% carbon and 10 1.5% chromium) and they are lubricated with high temperature greases or pastes based on silicone or PTFE thickeners and base oils. Often the bearings are also subjected to special heat treatment (stabilization) to secure that structural changes do not occur at higher temperatures (often up to about 200–250°C). However, these bearing types do not fulfill the requirements I and II of the standard for F600 motors and, most important, they do not 15 have a good behaviour with reference to requirements III and IV.

Based on these requirements it was anticipated from earlier experiences (e.g. SKF Evolution magazine 2/96, "Evaluating hybrid bearings for general applications") that hybrid bearings (bearings with AISI 52100 steel rings and silicon nitride ceramic rolling 20 elements) lubricated with long-life electric machinery grease would give the required (I–IV) performances for F400 and F600 motors. However, hybrid bearings would have difficulties to fulfill the low cost requirement (V) to enable broad acceptance.

A screening test was constructed to compare these hybrid bearings with other bearings 25 ability to perform according to the standard for the motors.

#### Example 1. – Screen test

Eight setups (sixteen bearings) with different 6205 deep groove ball bearing designs (ring and cage materials) and lubricants (greases) were selected to be tested (table 2). Tests were 30 carried out stepwise in sequence according to 100°C (2 hours run in); 200°C (1 hours); 300°C (1 hours); 400°C (1 hours); 600°C (1 hours); or until failure.

2003-02-20

Huvudfaxen Kasean

3

Test procedures: 15 min. at temperature / stop and standstill 2 min. / 45 min. at temperatures.

Running conditions:

5 Axial load ( $F_a$ ): 190 N

Radial load ( $F_r$ ): 350 N

Speed: 1500 rpm

Grease volume for (normal fill) 6205 bearing: about 1.8 cm<sup>3</sup>

Variant	Bearing materials	Grease
A.	Hybrid bearing (martensitic stainless steel rings); steel cage	Klüber Asonic GHY 72
B.	Hybrid bearing (AISI 52100 bearing steel rings); steel cage	Klüber Asonic GHY 72
C.	All-stainless (martensitic) steel bearings (rings and balls); steel cage	Klüber Asonic GHY 72
D.	All-steel (AISI 52100) bearing; steel cage	Klüber Barrierat L55/2
E.	All-steel (AISI 52100) bearing; steel cage	Dow Corning Molykote 41
F.	All-steel (AISI 52100) bearing; steel cage	Klüber Asonic GHY 72
G.	All-steel (AISI 52100) bearing, rings temperature stabilized to 150°C; steel cage	FT150 bearings from SNR; PTFE grease
H.	Hybrid bearing with AISI 52100 bearing steel rings and polyamide cage	Klüber Asonic GHY 72

10 Table 2.

Klüber Asonic GHY 72 grease – Electric motor grease, low noise, long life in 70–120°C interval (polyurea soap; synthetic ester base oil; and base oil viscosity approximately 72 cSt at 40 °C)

15 Klüber Barrierat L55/2 grease – PTFE based high temperature grease

Dow Corning Molykote 41 grease – Silicone based high temperature grease

#### Results of screen test

20 As expected the two hybrid bearing variants (A and B) survived the total cycle of the screen test. However, an all-stainless steel variant C (martensitic stainless steel X65Cr13) with an electric machinery grease did, surprisingly, outperform all other all-steel variants,

2003-02-20

Huvudfaxen Kassar

4

even them with high temperature greases, and showed the same level of survivability as the two hybrid bearing variants. This enables, unexpectedly, the fulfilling of the low cost requirement (V) and fulfilling of the safety function. The screen test results are shown in the accompanying Fig. 1 for deep groove ball bearings (designation 6205) for use in motors of smoke and heat exhaust ventilation systems. The other test samples D-H appearing in the test failed before reaching the test temperature.

5

The invention is not limited to the combination as described in the description, but modifications and variants are possible within the scope of the attached claims.

10

9  
2  
3  
4  
5  
6  
7  
8

**CLAIMS**

1. A bearing and lubricant combination for use as a supporting system for a rotating shaft in a smoke and heat exhaust ventilation system and having properties permitting it to fulfill the requirement to withstand an emergency temperature of 600°C for at least 60 minutes, with a stand-still of 2 minutes after 15 minutes exposure to the emergency temperature, wherein the bearing is a martensitic stainless bearing (rings) with a steel cage; and which bearing is lubricated with an ordinary electric motor grease with a base oil viscosity in the region of 50–200 cSt at 40°C.
2. A bearing and lubricant combination as claimed in claim 1, characterized therein, that the grease has a soap of polyurea.
3. A bearing and lubricant combination as claimed in claim 1 or 2, characterized therein, that the grease has a base oil of synthetic ester.
4. A bearing and lubricant combination as claimed in claim 1, characterized therein, that the bearing is a deep groove ball bearing.

# **ABSTRACT**

5 The present invention refers to a bearing and lubricant combination <C> for use as a supporting system for a rotating shaft in a smoke and heat exhaust ventilation system and having properties permitting it to fulfill the requirement to withstand an emergency temperature of 600°C for at least 60 minutes, with a stand-still of 2 minutes after 15 minutes exposure to the emergency temperature, wherein the bearing is a martensitic  
10 stainless bearing (rings) with a steel cage; and which bearing is lubricated with an ordinary electric motor grease with a base oil viscosity in the region of 50-200 cSt at 40°C.

(Fig. 1).

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
0

1:1

Ink. t. Patent- och reg.verket

2003 -02- 2 0

Huvudfaxen Kassen

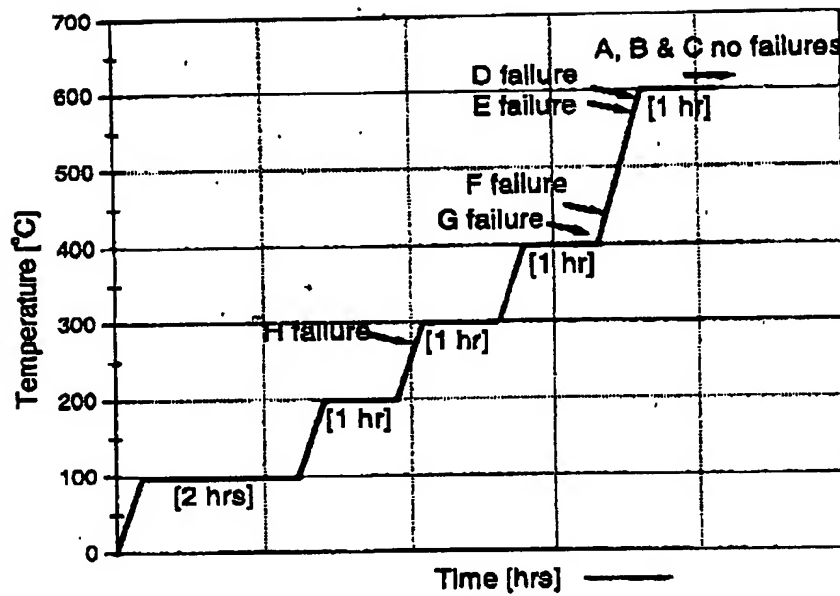


Fig.1